

A562 CIN



INDEXED CLAMPING LEVER WITH PLASTIC PUSH BUTTON AND WITH STAINLESS STEEL THREADED INSERT

INOX

Material:

Special high resistance glass fiber reinforced technopolymer. Oils and greases resistant.

Surface:

Satin.

Lever body and insert colour:

Black (RAL 9011).

Main insert:

Stainless steel insert with threaded blind bore. (Aisi 303) (Thread tolerance 6H).

Push Button:

Push button in black polyamide (RAL 9011).

Alternative colours for lever body and button:


Orange (RAL 2004 cod. 02)
Blue (RAL 5015 cod. 07)
Yellow (RAL 1021 cod. 10)
Red (RAL 3000 cod. 16)
Green (RAL 6024 cod. 17)
Grey (RAL 7035 cod. 13)

Spring:

Stainless steel spring (AISI 302).

SPECIAL REQUESTS:

- It's possible to supply the lever body an button with colours as shown in the table at page A-31 on request and for quantities.

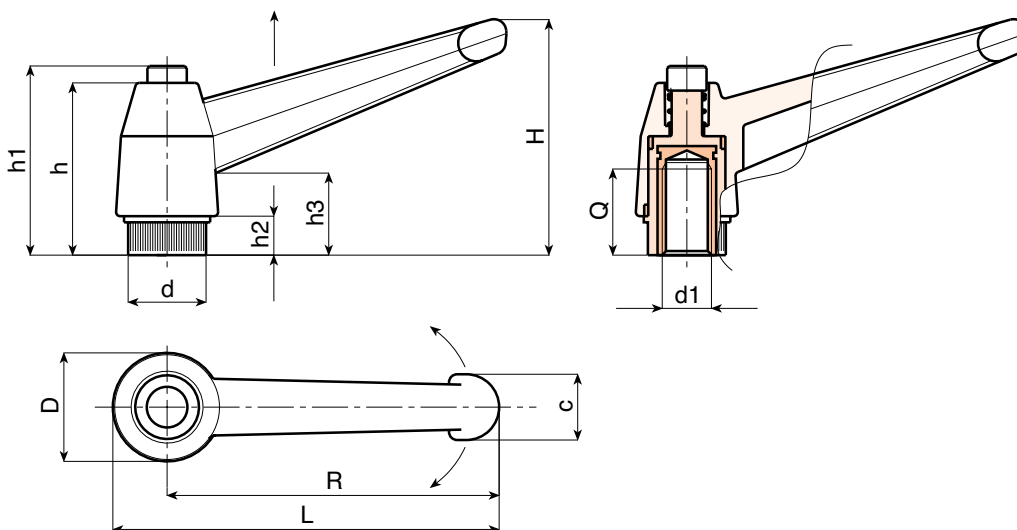

	Art.	L	R	H	D	d	c	h	h1	h2	h3	d1 6H	Q	g
●	A562043.TM0401CIN	52	43	33	17	11,5	11	27	30	6	14	M04	10	14
●	A562043.TM0501CIN	52	43	33	17	11,5	11	27	30	6	14	M05	9	14
●	A562043.TM0601CIN	52	43	33	17	11,5	11	27	30	6	14	M06	9	14
●	A562065.TM0601CIN	77	65	45	23	15	13	34	38	8	17	M06	15	28
●	A562065.TM0801CIN	77	65	45	23	15	13	34	38	8	17	M08	15	26
●	A562065.TM1001CIN	77	65	45	23	15	13	34	38	8	17	M10	13	28
●	A562083.TM0801CIN	97	83	57	27	19	16	43	47	10	23	M08	17	52
●	A562083.TM1001CIN	97	83	57	27	19	16	43	47	10	23	M10	17	48
●	A562083.TM1201CIN	97	83	57	27	19	16	43	47	10	23	M12	16	48
●	A562104.TM1001CIN	121	104	70	33	24	19	50	53	11	26	M10	20	114
●	A562104.TM1201CIN	121	104	70	33	24	19	50	53	11	26	M12	22	106
●	A562104.TM1401CIN	121	104	70	33	24	19	50	53	11	26	M14	21	100
●	A562104.TM1601CIN	121	104	70	33	24	19	50	53	11	26	M16	23	100

A - INDEXED AND FIXED LEVERS

ver. AUK.08-0616



BOTECA

Presumable presence in the stock in %

() 90% (●) 40% (●) 5% (●)

www.boteco.it - © All right reserved - BOTECA®
Any unauthorized reproduction is strictly forbidden