

111t00G075xcPP4

Construction And Materials


31.10.2023



Illustrative picture

Castor construction	swivel
Housing material	lacquered aluminium alloy
Swivel head construction	dvě kuličkové dráhy v kalených šálcích, kalené šálky
Wheel centre material	polyamide
Bearing	plain
Tread material	polyamide
Tread hardness	70 ShD
Non-marking tread	yes
Threadguard	
Weight	1,90 kg

Dimension Sketch

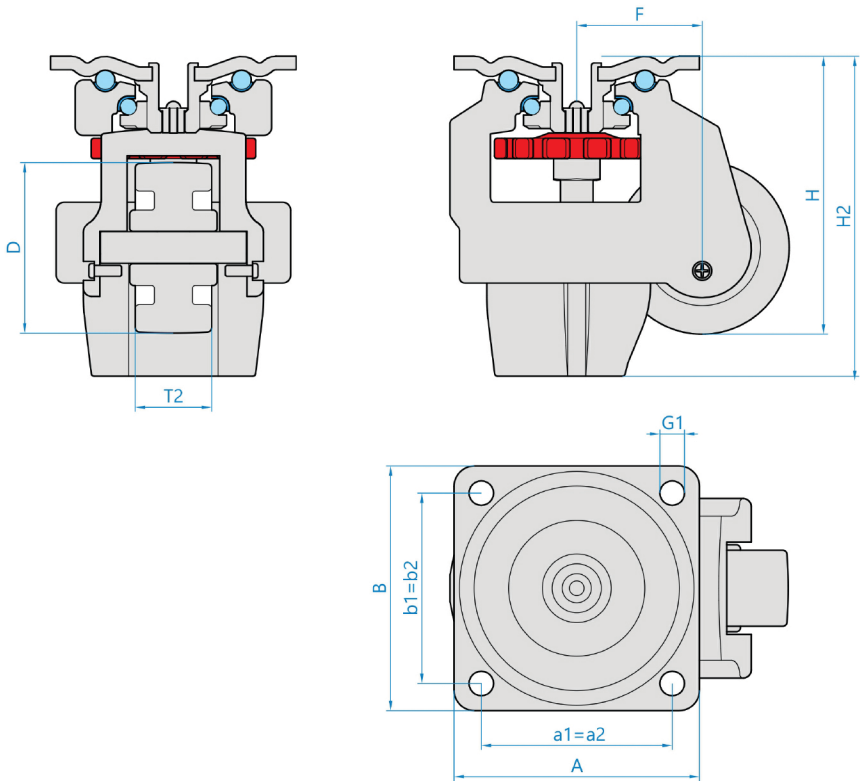

Basic Dimensions

D	75 mm
T2	30 mm
H	120 mm
H2	132 mm
F	53 mm
AxB	95x95 mm
a1xb1/a2xb2	70x70 mm
G1	11,0 mm

Properties

Dynamic load capacity	800 kg
Max. speed	1 km/h
Control type	manual
Non-marking tread	yes
ESD version	no
Amagnetic version	no
Temp. max.	+90°C
Temp. min	-10°C