



TNRC IP66

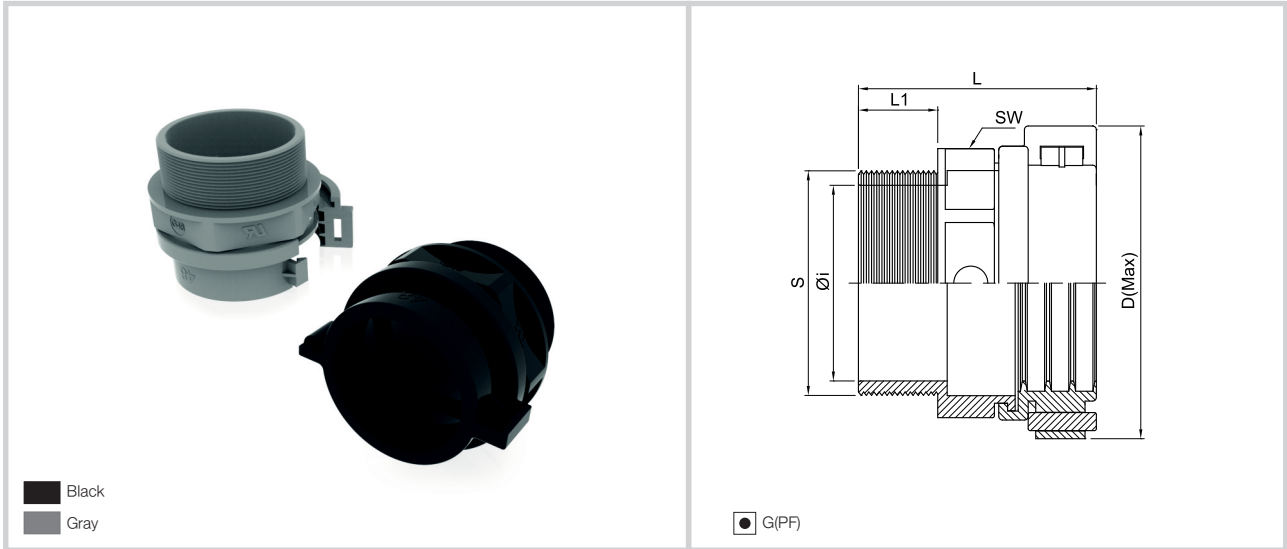

- Material : High Quality Polyamide 6
- Degrees of Protection : IP 66 (EN 60529)
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150° C
- Self-Extinguishing : UL94-HB / Free of Halogen Phosphorous and cadmium
- Color : Black & Gray
- Application : Machine tool, Shipbuilding, Tramway, Industrial / Automatic Machinery, Printing Machine etc. Applied in control box or moving point.

» Product size



PF Thread (JIS B0202)

Black	Gray	Thread	Tube Size	S	L1	L	Øi	ØD	SW
TNRC-G22B	TNRC-G22G	G3/4"	22	26.4	15.0	50.8	19.4	50.6	36.9
TNRC-G28B	TNRC-G28G	G1"	28	33.2	15.0	49.0	26.2	57.7	42.7
TNRC-G36B	TNRC-G36G	G1 1/4"	36	41.6	19.0	60.0	35.0	70.0	52.2
TNRC-G48B	TNRC-G48G	G2"	48	58.7	21.0	63.3	51.0	85.0	64.1

(Dimensions in mm)