


CONTI[®] SYNCHRO RIB

A combination of multiple V-ribbed belt and timing belt. Suitable for applications in the lower and medium specification range and as a heavy-duty timing belt for high power outputs at high speeds (CXP), or for the constant transmission of high torques at low speeds (CXA). The belt can also slip on the ribbed face if overloaded.

Properties:

- Temperature range from -20 °C to +100 °C, depending on application
- Antistatic in accordance with ISO 9563 (CXP/CXA)
- Conditionally resistant to oil
- Ozone-resistant
- Suitable for tropical climates
- Resistant to aging
- Maintenance-free

Belt structure:

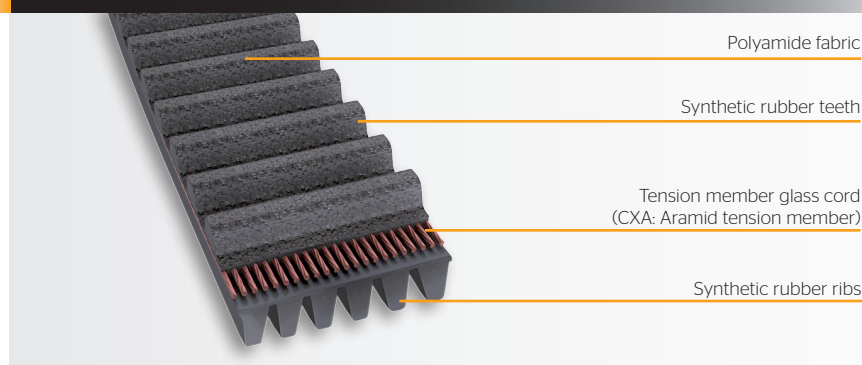

HTD

Profile	Length range L _p (mm)
HTD 8M	1760
HTD 8M CXP	1760

STD

Profile	Length range L _p (mm)
STD S8M	1552 - 1760
STD S8M CXP	1552 - 1760
STD S8M CXA	1760

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/disclosure

Power Transmission Group

ContiTech Antriebssysteme GmbH
D-30169 Hannover · Phone +49 511 938 - 71
industrie.as@ptg.contitech.de

ContiTech