



The best Return on Investment
Since 1972



HM200/ HM200 ECOLINE - WORKSHOP CRIMPERS

As the unrivaled classic in the 1 1/4" field, with its narrow, innovative construction, high level of user friendliness, versatility and long service life, the machine sets the unbeatable standard for quality and cost effectiveness. Its compact construction allows for ergonomic working. The use of solid master dies allows you to crimp all types of fittings with the tried and tested, greaseless slide bearing technology reduces maintenance costs.

Large opening travel

Allows crimping of elbow fittings easily, without removal of the dies

Compact engineered design

Fits easily into any workshop

Slide bearing technology

No greasing improves cleanliness of machine and prolongs machine

Maximum productivity with very low maintenance costs

Flaking cannot stick in grease, no risk of prematurely damaging the crimping head

End product can be used in sanitary applications without cleaning

20% more capability for crimping stronger or more difficult couplings versus our competition's equivalent crimpers

Consistently accurate crimp result

ECOLINE version

Economical models but with the same quality

CE compliant



Image shows: HM200

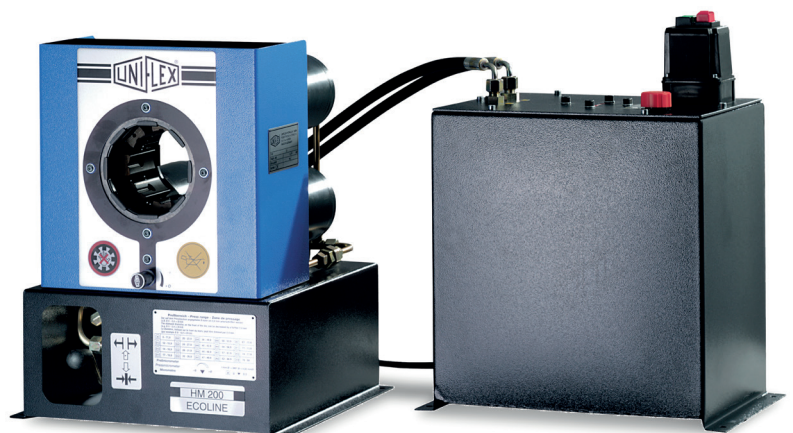


Image shows: HM200 ECOLINE



UNIFLEX.de
made in Germany

www.uniflex.de



The best Return on Investment
Since 1972



HM200/ HM200 ECOLINE - WORKSHOP CRIMPERS



The micrometer allows you to easily set the crimping diameter.



The large opening stroke allows you to crimp all common types of fittings without changing the crimp dies.



The 12V/24V units offer space- and weight-saving deployment options, e.g. for fitting service trucks.

Technical data	HM200	HM200 ECOLINE
Crimp force (kN / Ton)	1300 / 130	
No grease: 20% less friction	yes	
Control	Control A	ECOLINE
SAE R13 1 piece*	1 ½"	
SAE R12 2 pieces*	1 ¼"	
SAE R13 2 pieces*	1 "	
SAE R15 2 pieces*	1 "	
Industrial	2"	
90° Elbows	1 ½"	
Max. Crimp range	70 mm	
Opening	+ 30 mm	
Opening without dies	100 mm	
Type of dies	239	
Speed (mm/sec.)		
close	3.5	
crimp	3.5	
open	5.9	
Noise level	69 dBA	62 dBA
Drive	3 kW	3 kW**
Oil	40 l	40 l (4 l DC)
L x W x H (mm)	800 x 530 x 630	420 x 535 x 520
L x W x H (mm) Power Unit (DC)	-	450 x 270 x 230
Weight (kg)	140	88
Voltage variants (Other voltages on demand)		
HM200.4_00	380-420 Volt 50Hz 3Ph	
HM200.4_20	220-240 Volt 60Hz 3Ph	
HM200.4_21	220-240 Volt 50Hz 3Ph	
HM200.4 ECOLINE 3		
+ PUU 45.3L 3.0_00	380-420 Volt 50Hz 3Ph	
+ PUU 45.3L 3.0_20_21	220-240 Volt 60/50Hz 3Ph	
+ PUU 45.2L 2.2_22	220-230 Volt 60Hz 1Ph	
+ PUU 45.2L 2.2_23	220-230 Volt 50Hz 1Ph	
HM200.4 ECOLINE 3_DC		
+ PUF 4L.2.2.0_90	12 Volt DC	
+ PUF 4L.2.2.0_91	24 Volt DC	
Optional		
LUS / LUF	Workspace lights	
Accessories		
QDC 239.5	Quick change tool for dies	
QDS 239 C	Typ 239 (12 set) die storage	
QDS 239 R	Typ 239 (9 set) die storage	
TA	Depth stop (manual)	
PTS System	Marking system	
TU Rack 18-PB239	Workbench with storage (18 set)	
TU	Workbench	
Package		
Crimper+ PB Ø 17, 20, 24, 28, 32, 40, 44, 50		

Dies at a glance: PB239

Ø	6,8	9	12	14	16	17	19	20	22	24	26	28	32	36	40	44	47	50	54	57	62
mm	50	50	50	50	65	65	65	65	65	65	65	80	80	80	80	80	100	100	100	100	100

* According to the fitting
** According to the power unit