

## SIT-LOCK® self locking elements

### Advantages of SIT-LOCK® on the shaft-hub connection compared with traditional systems

#### Easy assembly and disassembly

Both actions take place by locking and unlocking the clamping screws with common tools.  
The use of a torque wrench is only necessary when a more precise torque is required.

#### Superior holding power

The action of the clamping cones creates shaft clamping torque superior to a normal keyed hub.

#### Overload protection

When the pre-set torque is exceeded SIT-LOCK® will slip, preventing the connected elements from being broken.

Note: SIT-LOCK® units are not friction couplings so, excessive slip will cause damage.

#### Easy adjustment

Combining the SIT-LOCK® design of smooth cone action with superior holding power, the hub can be clamped at any position along a shaft, eliminating the need for lock washers, spacers, stop rings, etc.

#### Precision location

With the SIT-LOCK® smooth cone action, the SIT-LOCK® is ideal for clamping cams, timing devices, and indexing mechanisms accurately and precisely.

#### Temperature

-20 °C ÷ 150 °C

#### Unlimited use possibilities

SIT-LOCK® units are suitable to connect any type of hub (flywheels, chainwheels, gears, levers, pulleys, eccentrics, coupling, etc).

#### Various solutions in stock

Available in stock in 10 different types, SIT-LOCK® units can be utilized in a varied range of industrial applications

#### Order form

SIT-LOCK®	CAL	1	F25 /50
CAL: SIT-LOCK® self locking element			
Type			
Shaft diameter			
External diameter (hub bore)			

### Performances

Given values of transmissible torque, axial force, and pressure between shaft and hub are valid for a lubricated installation (friction coefficient  $\mu=0,12$ ). Both hub and shaft, as well as locking unit's contact surfaces and screws, should be lubricated.

Locking unit and screws are supplied already oiled.

Always consider tolerances and roughness values per single locking unit.

**To avoid decrease of locking unit performances, do not use molybdenum disulfide lubricant or other substances that drastically reduce coefficient of friction.**

### Design procedure

For a correct functioning of SIT-LOCK®, the transmissible torque  $M_T$  (stated in this catalogue) must always exceed the maximum torque in operation. So, in selecting the SIT-LOCK® dimensions, you must consider the start up torque could be even 4 times larger than the nominal one.

The transmissible axial forces ( $F_{ax}$ ) given in the tables are valid for cases where there is no torque. If it is necessary to transmit both a torque and an axial force (ex. helical gear), the following formula must be used:

$$M_T \geq \sqrt{M_a^2 + \left(\frac{F_{ax} \cdot d}{2000}\right)^2} \quad [Nm]$$

where:

$M_a$  = maximum torque to be transmitted [Nm]

$F_{ax}$  = axial force in operation [N]


$d$  = shaft diameter [mm]



## SIT-LOCK® 4 - Self-Centering Heavy Duty

It is suitable for high torques and is self-centering. Recommended for applications that requires high transmission values and

excellent centering capabilities such as belt drums.



### Installation

Carefully clean contact surfaces of shaft and hub. Then, lightly oil both surfaces with standard mineral oil. Position the SIT-LOCK® on the shaft and into the hub machined bore. Align them as required by the application. Gradually and uniformly tighten the locking screws to the tightening torque (Ms).

You must tighten the screws in diametrically opposite sequence in stages:

- hand tighten the screws until the surfaces are in contact

### Removal

Gradually loosen the clamping screws. Transfer the screws into the releasing tapped holes and tighten them until the front cone is released. Loosen the clamping screws again. Transfer the clamping screws into the releasing holes of the intermediate ring, and tighten them until the back cone is released.

### Concentricity

For self-centering locking assemblies, the clamping element has a centering effect and the concentricity error can be considered 0.02-0.04 mm.

- carefully check the position of the hub on the shaft
- tighten the screws to half the value of the tightening torque (Ms) stated in the catalogue
- repeat the operation until the tightening torque is reached using the dynamometric screw-driver
- check every locking screw to insure it has been tightened to the specific tightening torque

*Do not use lubricant like "Molykote" or molybdenum disulfide based oils.*

*Note: To reuse the locking element, carefully oil the screws and the conical surfaces, then follow installation instructions.*

<b>Maximum allowable roughness</b>
Rt 16 µm
<b>Maximum recommended tolerance</b>
shaft h 8 - hub H 8

## SIT-LOCK® 4

d x D	Dimensions [mm]			Performances		Pressure [N/mm <sup>2</sup> ]		Clamping screws (DIN 912 - 12,9)		
	H <sub>0</sub>	H <sub>1</sub>	H <sub>2</sub>	M <sub>T</sub> [Nm]	F <sub>ax</sub> [kN]	p <sub>w</sub>	p <sub>n</sub>	N°	Type	M <sub>s</sub> [Nm]
25 x 50	41	45	51	830	66	172	86	6	M6	17
28 x 55	41	45	51	1.239	89	205	104	8	M6	17
30 x 55	41	45	51	1.328	89	191	104	8	M6	17
35 x 60	41	45	51	1.549	89	164	95	8	M6	17
38 x 65	41	45	51	1.682	89	151	88	8	M6	17
40 x 65	41	45	51	2.213	111	179	110	10	M6	17
42 x 75	41	45	53	3.435	164	252	141	8	M8	41
45 x 75	41	45	53	3.680	164	235	141	8	M8	41
48 x 80	58	62	70	3.926	164	156	94	8	M8	41
50 x 80	58	62	70	4.089	164	150	94	8	M8	41
55 x 85	58	62	70	4.498	164	136	88	8	M8	41
60 x 90	58	62	70	6.134	204	156	104	10	M8	41
65 x 95	58	62	70	6.645	204	144	98	10	M8	41
70 x 110	70	76	86	11.363	325	176	112	10	M10	83
75 x 115	70	76	86	12.174	325	164	107	10	M10	83
80 x 120	70	76	86	15.583	390	185	123	12	M10	83
85 x 125	70	76	86	16.557	390	174	118	12	M10	83
90 x 130	70	76	86	17.531	390	164	114	12	M10	83
95 x 135	70	76	86	18.505	390	155	109	12	M10	83
100 x 145	92	98	110	28.361	567	164	113	12	M12	145
110 x 155	92	98	110	31.197	567	149	106	12	M12	145
120 x 165	92	98	110	39.706	662	159	116	14	M12	145
130 x 180	108	114	128	50.589	778	147	106	12	M14	230
140 x 190	108	114	128	63.560	908	159	117	14	M14	230
150 x 200	108	114	128	77.829	1.038	170	127	16	M14	230
160 x 210	108	114	128	83.017	1.038	159	121	16	M14	230
170 x 225	136	146	162	107.267	1.262	145	109	14	M16	355
180 x 235	136	146	162	129.802	1.442	156	120	16	M16	355
190 x 250	136	146	162	137.014	1.442	148	113	16	M16	355
200 x 260	136	146	162	144.225	1.442	141	108	16	M16	355
220 x 285	136	146	162	198.309	1.803	160	123	20	M16	355
240 x 305	136	146	162	237.971	1.983	161	127	22	M16	355
260 x 325	136	146	162	257.802	1.983	149	119	22	M16	355
280 x 355	138	148	168	393.980	2.814	193	152	20	M20	690
300 x 375	165	177	197	464.334	3.096	166	133	22	M20	690
320 x 405	165	177	197	495.289	3.096	156	123	22	M20	690
340 x 425	165	177	197	574.085	3.377	160	128	24	M20	690
360 x 455	188	202	224	693.598	3.853	151	119	22	M22	930
380 x 475	188	202	224	865.246	4.554	169	135	26	M22	930
400 x 495	188	202	224	910.786	4.554	161	130	26	M22	930

**Notes:**

Dimensions representing the total length of the hub are indicative; they are calculated according to the geometric rules.

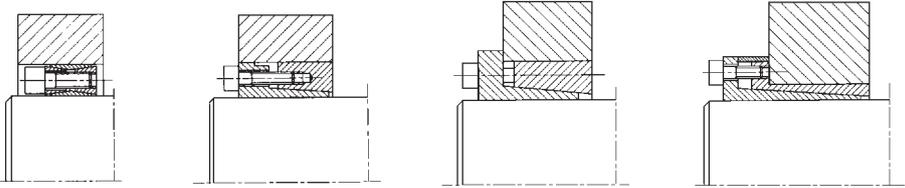
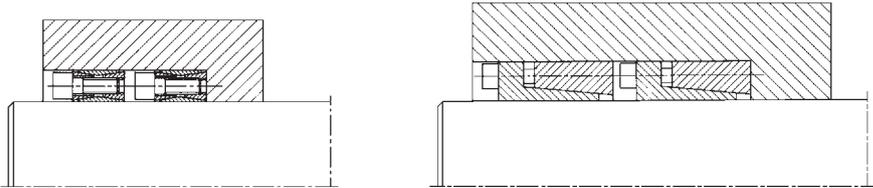
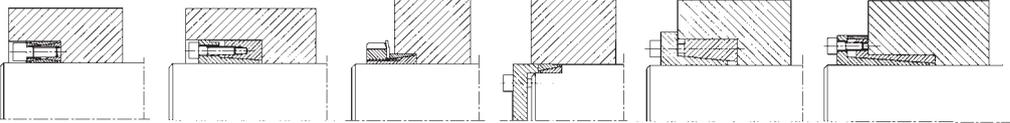
For assemblies requiring larger dimensions, contact our Technical Department.

M <sub>s</sub>	Screw tightening torque	Nm
M <sub>T</sub>	Transmissible torque moment	Nm
F <sub>ax</sub>	Transmissible axial load	N
p <sub>w</sub>	Shaft pressure	N/mm <sup>2</sup>
p <sub>n</sub>	Hub pressure	N/mm <sup>2</sup>

## Design of hub outside minimum diameter

When using the locking units, the shaft-hub connection is characterized by a pressure on the hub surface, which is exerted by the locking unit outer ring when the clamping screws are tightened to the stated value. It is important to design correctly the hub outside diameter. The following table summarizes the procedure as a simple calculation. To determine the hub outside minimum

diameter, simply multiply the factor K by the SIT-LOCK® outside diameter to obtain the hub outside minimum diameter. The factor K varies depending on the yield limit of hub material, the hub surface pressure (Pn) and the factor (x), variable according to the application type (A, B, C).

<p>Installation type A (<math>L_M \cong L_C</math>) X = 1</p> 
<p>Installation type B (<math>L_M \cong 2 L_C</math>) X = 0,8</p> 
<p>Installation type C (<math>L_M &gt; 2 L_C</math>) X = 0,6</p> 
<p><b>Hub min diameter <math>D \times K</math></b> for: K = factor stated in the table D = SIT-LOCK® outside diameter</p>

$L_M$	Hub length	mm
$L_C$	SIT-LOCK® length	mm

### Hollow shaft

For application with locking-assemblies on hollow shaft, it is important to scale both hub minimum diameter and hollow

shaft diameter. Contact our Technical Department for design.

# Coefficient K

Hub surface pressure		Yield limit of hub material $\sigma_{02}$ [N/mm <sup>2</sup> ]										
		150	180	200	220	250	270	300	350	400	450	600
P <sub>n</sub> [N/mm <sup>2</sup> ]	Application	Hub material										Heat treatment steel
		GG 20	GG 25 GS 38	GG 30 GTS 35	GS 45 ST 37-2	GG 40 GS 52	ST 50-2 C 35	GG 50 GS 60 ST 60-2	GG 60 GS 62 ST 70-2	GG 70 GS 70 C 60		
60	C	1,29	1,26	1,21	1,19	1,16	1,15	1,13	1,11	1,10	1,09	1,07
	B	1,40	1,31	1,25	1,24	1,23	1,21	1,19	1,16	1,13	1,12	1,09
	A	1,53	1,43	1,37	1,33	1,29	1,26	1,23	1,19	1,17	1,15	1,11
65	C	1,31	1,26	1,23	1,21	1,19	1,16	1,14	1,12	1,11	1,10	1,08
	B	1,45	1,36	1,31	1,29	1,25	1,23	1,21	1,17	1,15	1,13	1,10
	A	1,61	1,46	1,41	1,36	1,31	1,29	1,25	1,21	1,19	1,17	1,13
70	C	1,35	1,27	1,25	1,23	1,19	1,17	1,16	1,13	1,12	1,11	1,08
	B	1,49	1,39	1,35	1,31	1,26	1,24	1,21	1,19	1,16	1,14	1,11
	A	1,66	1,51	1,46	1,41	1,35	1,31	1,26	1,23	1,21	1,18	1,14
75	C	1,31	1,29	1,26	1,24	1,21	1,19	1,16	1,15	1,13	1,12	1,09
	B	1,53	1,43	1,37	1,33	1,29	1,26	1,23	1,19	1,17	1,15	1,12
	A	1,75	1,56	1,49	1,43	1,37	1,34	1,31	1,26	1,21	1,19	1,14
80	C	1,40	1,32	1,29	1,26	1,22	1,21	1,19	1,16	1,14	1,12	1,09
	B	1,59	1,46	1,40	1,36	1,31	1,28	1,25	1,21	1,19	1,16	1,12
	A	1,82	1,62	1,54	1,47	1,40	1,37	1,32	1,27	1,23	1,21	1,15
85	C	1,43	1,35	1,31	1,28	1,24	1,22	1,20	1,17	1,15	1,13	1,10
	B	1,64	1,50	1,43	1,39	1,33	1,30	1,27	1,23	1,20	1,17	1,13
	A	1,91	1,68	1,58	1,51	1,43	1,40	1,35	1,29	1,25	1,22	1,16
90	C	1,47	1,37	1,33	1,29	1,26	1,23	1,21	1,18	1,16	1,14	1,10
	B	1,70	1,54	1,47	1,41	1,35	1,32	1,29	1,24	1,21	1,19	1,14
	A	2,01	1,74	1,63	1,55	1,47	1,42	1,37	1,31	1,27	1,23	1,17
95	C	1,50	1,40	1,35	1,31	1,27	1,25	1,22	1,19	1,16	1,15	1,11
	B	1,76	1,58	1,50	1,44	1,38	1,35	1,31	1,26	1,22	1,20	1,15
	A	2,12	1,81	1,69	1,60	1,50	1,45	1,40	1,33	1,28	1,25	1,18
100	C	1,54	1,42	1,37	1,33	1,29	1,26	1,23	1,20	1,17	1,15	1,12
	B	1,82	1,62	1,54	1,47	1,40	1,37	1,32	1,27	1,23	1,21	1,15
	A	2,25	1,88	1,74	1,64	1,54	1,49	1,42	1,35	1,30	1,26	1,19
105	C	1,57	1,45	1,40	1,35	1,30	1,28	1,25	1,21	1,18	1,16	1,12
	B	1,89	1,67	1,57	1,51	1,43	1,39	1,34	1,29	1,25	1,22	1,16
	A	2,39	1,96	1,80	1,69	1,57	1,52	1,45	1,37	1,32	1,28	1,20
110	C	1,61	1,48	1,42	1,37	1,32	1,29	1,26	1,22	1,19	1,17	1,13
	B	1,97	1,72	1,61	1,54	1,45	1,41	1,36	1,30	1,26	1,23	1,17
	A	2,56	2,05	1,87	1,74	1,61	1,55	1,48	1,39	1,34	1,29	1,21
115	C	1,65	1,51	1,44	1,37	1,34	1,31	1,27	1,23	1,20	1,18	1,13
	B	2,05	1,77	1,65	1,57	1,48	1,44	1,38	1,32	1,27	1,24	1,18
	A	2,76	2,14	1,94	1,80	1,65	1,59	1,51	1,42	1,35	1,31	1,22
120	C	1,70	1,54	1,47	1,40	1,35	1,32	1,29	1,24	1,21	1,19	1,14
	B	2,14	1,82	1,70	1,61	1,51	1,46	1,40	1,34	1,29	1,25	1,19
	A	3,01	2,25	2,01	1,85	1,70	1,62	1,54	1,44	1,37	1,32	1,23
125	C	1,74	1,57	1,49	1,44	1,37	1,34	1,30	1,25	1,22	1,19	1,14
	B	2,25	1,88	1,74	1,64	1,54	1,49	1,42	1,35	1,30	1,26	1,19
	A	3,33	2,36	2,09	1,92	1,74	1,66	1,57	1,46	1,39	1,34	1,25
130	C	1,79	1,60	1,52	1,46	1,39	1,36	1,31	1,26	1,23	1,20	1,15
	B	2,36	1,94	1,79	1,68	1,57	1,51	1,45	1,37	1,31	1,28	1,20
	A	3,75	2,50	2,18	1,98	1,79	1,70	1,60	1,49	1,41	1,36	1,26
135	C	1,84	1,62	1,55	1,48	1,41	1,37	1,33	1,28	1,24	1,21	1,16
	B	2,49	2,01	1,84	1,72	1,60	1,54	1,47	1,39	1,33	1,29	1,21
	A	4,37	2,66	2,28	2,05	1,84	1,74	1,63	1,51	1,43	1,37	1,27
140	C	1,89	1,67	1,57	1,51	1,43	1,39	1,34	1,29	1,25	1,22	1,16
	B	2,64	2,08	1,89	1,76	1,63	1,55	1,49	1,40	1,34	1,30	1,22
	A	5,40	2,84	2,39	2,13	1,89	1,79	1,67	1,54	1,45	1,39	1,28
145	C	1,95	1,70	1,60	1,53	1,45	1,41	1,36	1,30	1,26	1,23	1,17
	B	2,81	2,16	1,95	1,81	1,66	1,59	1,51	1,42	1,36	1,31	1,23
	A	7,67	3,06	2,51	2,22	1,95	1,83	1,70	1,56	1,47	1,41	1,29
150	C	2,01	1,74	1,63	1,55	1,47	1,42	1,37	1,31	1,27	1,24	1,17
	B	3,01	2,25	2,01	1,85	1,70	1,62	1,54	1,44	1,37	1,32	1,24
	A	—	3,33	2,66	2,31	2,01	1,88	1,74	1,59	1,49	1,42	1,30
155	C	2,07	1,78	1,66	1,58	1,49	1,44	1,39	1,32	1,28	1,25	1,18
	B	3,26	2,34	2,07	1,90	1,73	1,66	1,56	1,46	1,39	1,34	1,24
	A	—	3,67	2,81	2,41	2,07	1,93	1,78	1,62	1,52	1,44	1,31
160	C	2,14	1,82	1,70	1,61	1,51	1,46	1,40	1,34	1,29	1,25	1,19
	B	3,56	2,44	2,14	1,95	1,77	1,68	1,59	1,48	1,40	1,35	1,25
	A	—	4,13	3,01	2,53	2,14	1,99	1,82	1,65	1,54	1,48	1,32
165	C	2,22	1,87	1,73	1,63	1,53	1,48	1,42	1,35	1,30	1,26	1,19
	B	3,97	2,56	2,22	2,01	1,81	1,72	1,61	1,50	1,42	1,36	1,26
	A	—	4,81	3,24	2,66	2,22	2,05	1,87	1,68	1,56	1,48	1,34

Note: p<sub>n</sub> is stated in the dimensional table of each of the locking assemblies. Installation type (A, B, C) are stated in the previous page.

## Example of calculation procedure

### Design data

- Power transmission element to be connected: V-pulley
- Shaft diameter: 50 mm
- Maximum Torque in operation (Ma): 1.500 Nm
- V-pulley material: cast iron GG20
- Yield limit of V-pulley material: 150 N/mm<sup>2</sup>

### Calculation

- SIT-LOCK<sup>®</sup> type: for this kind of application SIT-LOCK<sup>®</sup> 1 is suggested
- Size selection: 50 x 80 mm (see table SIT-LOCK<sup>®</sup> 1)
- Performance control: verify  $M_T \geq M_a$   
From the table obtain  $M_T = 1.889$  Nm, so the above condition is verified
- Tolerance: h11 for the shaft - H11 for the SIT-LOCK<sup>®</sup> bore
- Roughness:  $R_t \leq 16$
- Screws tightening torque:  $M_s = 37$  Nm (see table SIT-LOCK<sup>®</sup> 1)
- Hub surface pressure: from the table you can find the value  $P_n = 125$  N/mm<sup>2</sup>
- Application type: in this case it is preferable to adopt the application "C" with the centering guide between shaft and hub

- Coefficient K : obtained through the table "Coefficient K" by considering the following information:
  - yield limit of hub material = 150 N/mm<sup>2</sup>
  - hub surface pressure = 125 N/mm<sup>2</sup>
  - installation C
 Then,  $K = 1,74$

- Hub outside minimum diameter:

$$\text{Hub } D_{\min} \geq D \cdot K$$

for

- D = SIT-LOCK<sup>®</sup> outside diameter [mm]
- K = 1,74

Then, hub  $D_{\min} = (80 \cdot 1,74) = \mathbf{140 \text{ [mm]}}$

## DIN 912

Screw diameter	P <sub>v</sub> [N]			M <sub>s</sub> [Nm]		
	8,8	10,9	12,9	8,8	10,9	12,9
M2,5	1.600	2.140	2.565	0,76	1,0	1,2
M3	2.210	3.110	3.730	1,3	1,9	2,2
M4	3.900	5.450	6.550	2,9	4,1	4,9
M5	6.350	8.950	10.700	6	8,5	10
M6	9.000	12.600	15.100	10	14	17
M7	13.200	18.500	22.200	16	23	28
M8	16.500	23.200	27.900	25	35	41
M9	22.000	30.900	37.100	36	51	61
M10	26.200	36.900	44.300	49	69	83
M12	38.300	54.000	64.500	86	120	145
M14	52.500	74.000	88.500	135	190	230
M16	73.000	102.000	123.000	210	295	355
M18	88.000	124.000	148.000	290	405	485
M20	114.000	160.000	192.000	410	580	690
M22	141.000	199.000	239.000	550	780	930
M24	164.000	230.000	276.000	710	1.000	1.200
M27	215.000	302.000	363.000	1.050	1.500	1.800
M30	262.000	368.000	442.000	1.450	2.000	2.400