


KS 60 KS系列模组 KS series module

□ 订购型号代码 Code

KS60D	05	P	—	200	A	2	—	F0	C	S0
本体型号 Item NO.	螺杆行程 Travel	精度等级 Accuracy Grade		轨道长度mm Track Length	滑座形式 Slide Types	滑座数量 Slide Number		马达连接法兰 Motor Connection	护盖 Protecting Cover	极限开关 Limit Switch
	05	P: 精密级 Precision Class		150	A: 标准型 Standard Type	1		F0 ~ F5	C: 铝护套 Aluminum Cover	S0: 极限轨道 S0: Extreme orbit
	10	C: 一般级 Normal Class		200	S: 轻载型 Light Load Type	2		H0	B: 伸缩护套 Telescopic cover	S1: 极限轨道+3个光 S1: Extreme orbit+3 Photoelectric devices
				300				T1/T2/T5	无标记: 无护套 None: no cover	
				400				注: 详见P55. Note: See catalogue P55.		
				500						
				600						

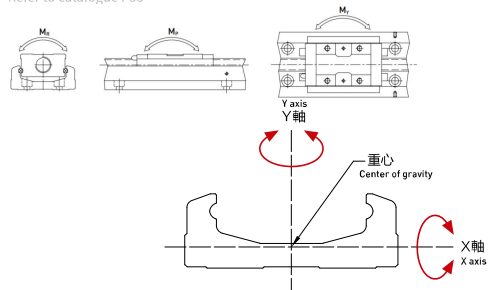

I_x : 延著X軸之慣性矩 Moment of inertia along the X-axis
 I_y : 延著Y軸之慣性矩 Moment of inertia along the Y-axis

慣性矩	單位 mm ⁴
-----	--------------------



慣性矩 單位:mm⁴

型號	I_x	I_y
KS60	2.056×10^4	2.802×10^5

基本规格 Basic Specification

[illegible]

型號 Code	軌道長度 Length of Rail (mm)	重複定位精度 (mm) Repetitive Accuracy		行走平行度 (mm) Travelling Parallelism		最大啟動扭力 (N · cm) Max.Driving Torque	
		P	C	P	C	P	C
KS60D	150						
	200	±0.003	±0.005	0.010	/	15	7
	300						
	400						
	500	±0.003	±0.005	0.015	/	15	7
	600						









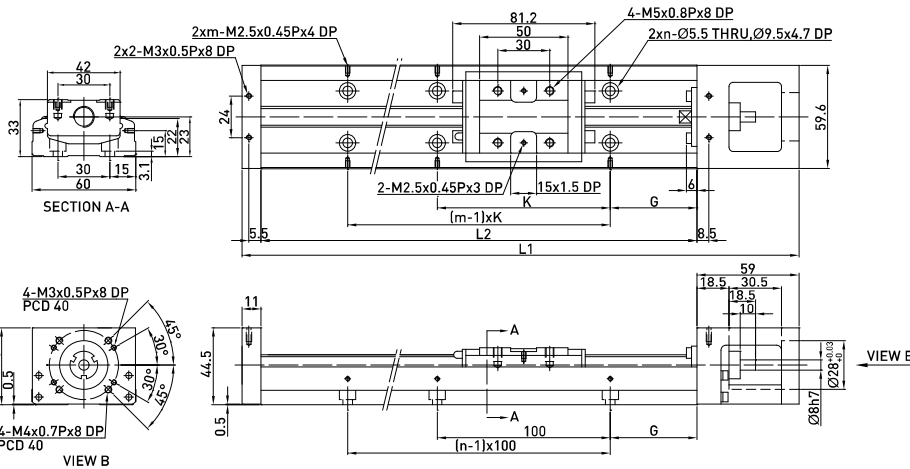


軌道長度 L2 (mm)	全長 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	220	60	-	25	100	2	2	1.5	-
200	270	110	-	50	100	2	2	1.8	-
300	370	210	135	50	200	3	2	2.4	2.7
400	470	310	235	50	100	4	4	3	3.3
500	570	410	335	50	200	5	3	3.6	3.9
600	670	510	435	50	100	6	6	4.2	4.6


#注:肩部外径可特殊制作Φ6, 请与LIMON联络。

#Note: The shaft diameter can be special made in $\Phi 6$, pls contact LIMON.

馬達座 F0

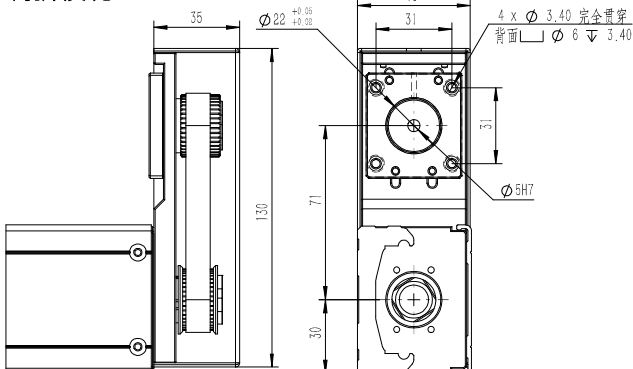


KS50

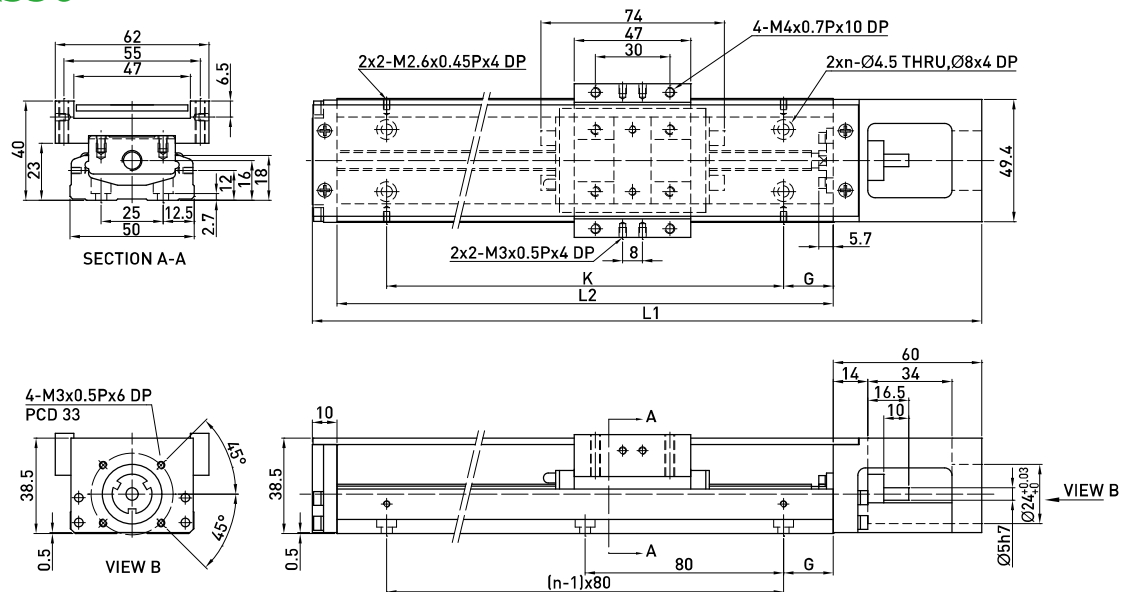

軌道長度 L2 (mm)	全長 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
150	220	70	-	35	80	2	1.1	-
200	270	120	55	20	160	3	1.3	1.5
250	320	170	105	45	160	3	1.6	1.8
300	370	220	155	30	240	4	1.8	2.0

KS60D

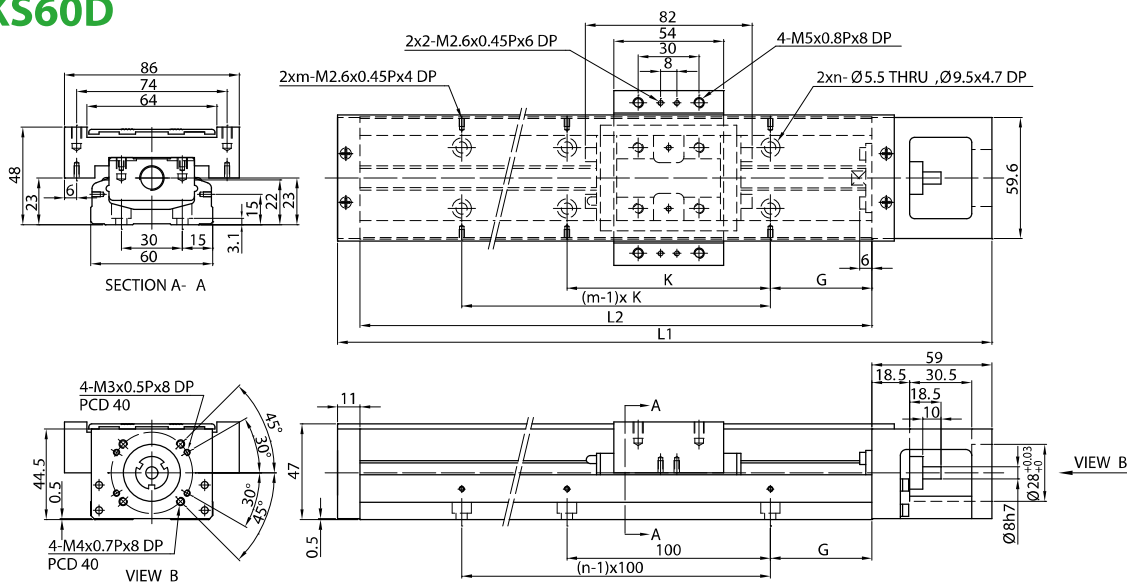

軌道長度 L2 (mm)	全長 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	220	60	-	25	100	2	2	1.7	-
200	270	110	-	50	100	2	2	2.1	-
300	370	210	135	50	200	3	2	2.7	3.0
400	470	310	235	50	100	4	4	3.3	3.6
500	570	410	335	50	200	5	3	3.9	4.2
600	670	510	435	50	100	6	6	4.6	5.0