SERIES 82

260 mm

150 daN
4 km/h

-20 / +60 °C

PNEUMATIC WHEELS WITH POLYPROPYLENE CENTRE



Description

Tyre: four plies ribbed or country profiled tyre; working pressure 2 bar.

Centre: polypropylene.

Hub with plain bore which directly houses the axle.
Hub with cylindrical roller bearing with plastic cage.

Uses

Suitable for use with light and medium-duty loads, on any type of flooring, also for mixed indoor and outdoor use.
Also suitable on sandy base.
Examples of recommended applications: wheelbarrows, box charts.

Environments of use

Suitable for industrial and outdoor environments, also in presence of humidity and medium-harsh chemical agents.
Not suitable in presence of organic solvents, chlorinated substances, hydrocarbons and mineral oils.

WEAK ACIDS		WEAK BASES	
STRONG ACIDS		STRONG BASES	
WATER		HYDROCARBONS	
ALCOHOL		SOLVENTS	

For information on the compatibility of the component wheel materials with specific aggressive chemical substances, see table at page 36.

Floors

It is functional on all type of floors and especially on uneven floors and soft floor surfaces such as grass, as well as on floor with obstacles and with chips.







mm	mm	kg	CODE	kg	CODE	mm	mm	daN	
260	85	0.91	821601	1.03	823601	20	74	**150**	**ribbed profile**
260	85	0.90	821602	1.00	823602	25	74	**150**	**ribbed profile**
260	85	0.96	822601	1.08	824601	20	74	**150**	**country profile**
260	85	0.95	822602	1.05	824602	25	74	**150**	**country profile**

Standard-duty brackets NL - max carrying capacity 150 daN

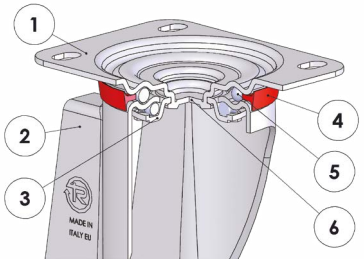

1) Plate: electrolytically galvanised steel plate
2) Fork: electrolytically galvanised steel plate
3) Ball race ring: electrolytically galvanised steel plate
4) Dust seal: orange polyethylene
5) Swivel actions: double ball ring with grease lubrication
6) King pin: integrated with the plate and cold-riveted

mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN
260	85	4.33	825601	2.83	826601	300	200x160	160x120	14	86	**150**
260	85	4.43	825701	2.93	826701	300	200x160	160x120	14	86	**150**




mm	mm	kg	CODE	kg	CODE	mm	mm	mm	mm	mm	daN
260	85	4.38	825602	2.89	826602	300	200x160	160x120	14	86	**150**
260	85	4.48	825702	2.98	826702	300	200x160	160x120	14	86	**150**